



EMC EN 55015 / EN 61547 / EN 61000-3-2 / EN 61000-3-3
 LVD EN 61000-3-3 / EN 62560 / EN 62471


- AC/DC 12V
- AC 100-240V
- AC 200-240V
- PF ≥0.9
- CRI 80/90
- DIM
- IP20
- 38°
- 60°

BW-1166-GU10-8W


Technical Parameters

Light Source	Epistar COB LED
Power	8W
CCT	3000K, 4000K, 5000K, 5700K
Lumen	640-750lm
CRI	≥80
Input Voltage	AC100-240V 50Hz
Beam Angle	38° / 60°
Finishing Color	Silver
Dimension	Ø50*87mm
Power Factor	≥0.9
Lifespan	50000h
IP Rating	IP20
Driver	Standard/Dimmable
Dimming	Triac Dimmers
Mounting	Recessed Ceiling
Operating Temperature	-20°C~+45°C

Dimension

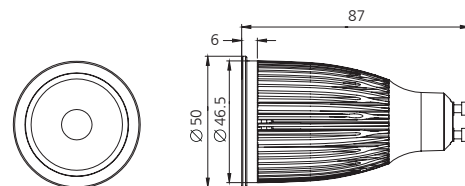

Polar Diagram

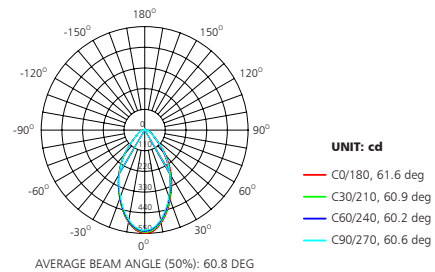

Photometric Diagram

