

# Bretton Reflector-A LED Down Light




## Special Features

- ▶ Unique optical system of focus reflection
- ▶ Double reflecting cups
- ▶ Efficient light output and free of glares
- ▶ Ensure comfortable lighted surrounding
- ▶ Driver: Brettonwoods / Meanwell / Tridonic
- ▶ Non Dim / Triac Dim / 0-10V Dim / DALI Dim options available.
- ▶ To use high brightness, low light decline, long life performance CITIZEN COB LED.
- ▶ Working Temperature : -20°C~+45°C



EMC EN 55015 / EN 61000-3-2 / EN 61000-3-3 / EN 61547  
 LVD EN 60598-2-2 / EN 60598-1 / EN 62471 / EN 62031

## Dimension

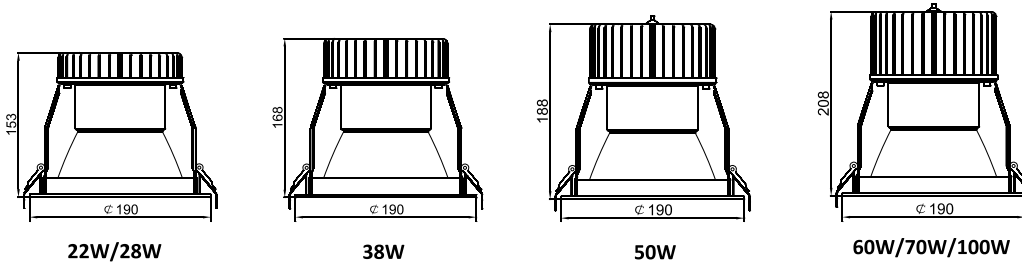

## Technical Specification

Model	Voltage	Input Current	Power	Non-DIM Lumen (±5%)			CRI	Power Factor	Cutout
				3000K	4000K	5000K			
BW-2706-22W-A	AC100-265V	520mA	22W	1729	1806	1973	≥83	≥0.95	Ø175
BW-2706-28W-A	AC100-265V	700mA	28W	2700	2800	2940	≥83	≥0.95	Ø175
BW-2706-38W-A	AC100-265V	900mA	38W	3848	4161	4282	≥83	≥0.95	Ø175
BW-2706-50W-A	AC100-265V	1200mA	50W	5072	5162	5227	≥83	≥0.95	Ø175
BW-2706-60W-A	AC100-265V	1500mA	60W	5830	5937	6114	≥83	≥0.95	Ø175
BW-2706-70W-A	AC100-265V	1700mA	70W	7005	7760	7797	≥83	≥0.95	Ø175
BW-2706-100W-A	AC100-265V	2000mA	100W	9723	9887	10007	≥83	≥0.95	Ø175

## Photometric Diagram

