


Special Features

- ▶ Unique optical system of focus reflection
- ▶ Double reflecting cups
- ▶ Efficient light output and free of glares
- ▶ Ensure comfortable lighted surrounding
- ▶ Driver: Brettonwoods / Meanwell / Tridonic
- ▶ Non Dim / Triac Dim / 0-10V Dim / DALI Dim options available.
- ▶ To use high brightness, low light decline, long life performance CITIZEN COB LED.
- ▶ Working Temperature : -20°C~+45°C



EMC EN 55015 / EN 61000-3-2 / EN 61000-3-3 / EN 61547
 LVD EN 60598-2-2 / EN 60598-1 / EN 62471 / EN 62031


Dimension

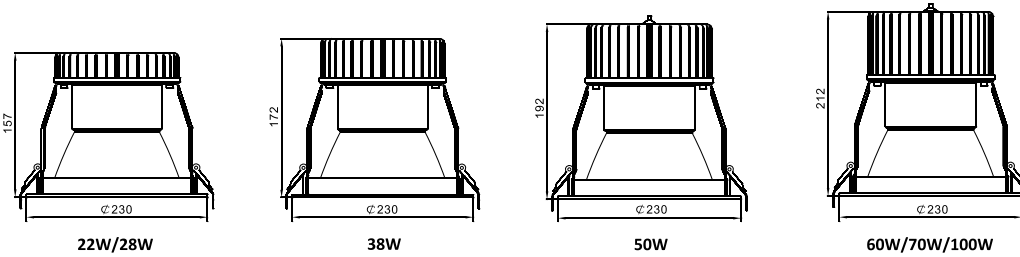

Technical Specification

Model	Voltage	Input Current	Power	Non-DIM Lumen (±5%)			CRI	Power Factor	Cutout
				3000K	4000K	5000K			
BW-2702-22W-A	AC100-265V	520mA	22W	1658	1811	1902	≥83	≥0.95	Ø210
BW-2702-28W-A	AC100-265V	700mA	28W	2672	2781	2813	≥83	≥0.95	Ø210
BW-2702-38W-A	AC100-265V	900mA	38W	3540	3823	4010	≥83	≥0.95	Ø210
BW-2702-50W-A	AC100-265V	1200mA	50W	4555	4769	4823	≥83	≥0.95	Ø210
BW-2702-60W-A	AC100-265V	1500mA	60W	5238	5468	5688	≥83	≥0.95	Ø210
BW-2702-70W-A	AC100-265V	1700mA	70W	6442	7082	7197	≥83	≥0.95	Ø210

Photometric Diagram

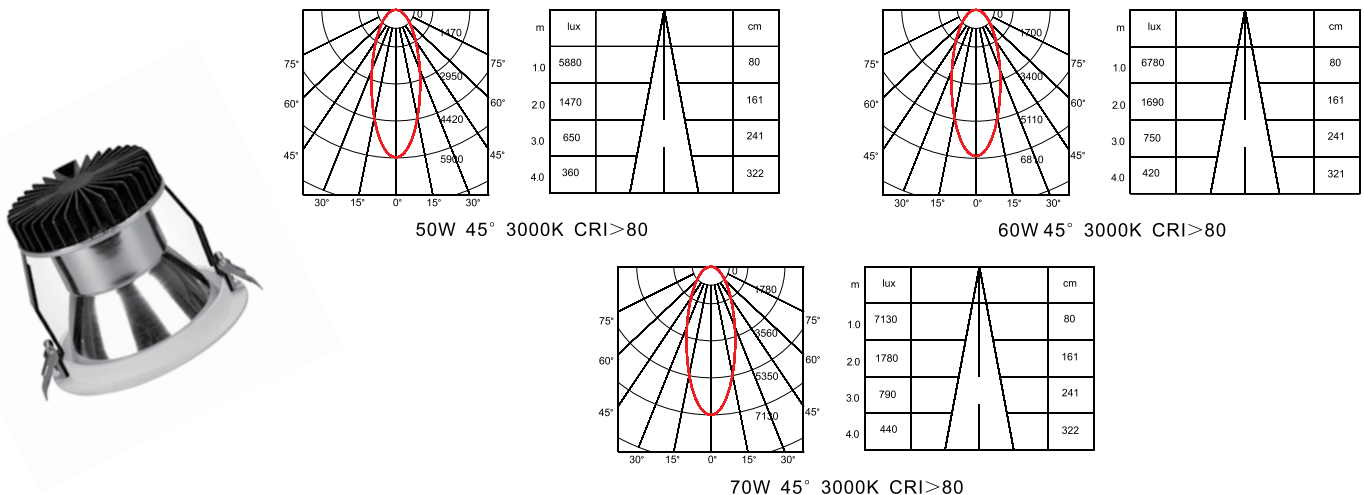

BRETTON REFLECTOR-A LED DOWN LIGHT