

Bretton Reflector-A LED Down Light




Special Features

- ▶ Unique optical system of focus reflection
- ▶ Double reflecting cups
- ▶ Efficient light output and free of glares
- ▶ Ensure comfortable lighted surrounding
- ▶ Driver: Brettonwoods / Meanwell / Tridonic
- ▶ Non Dim / Triac Dim / 0-10V Dim / DALI Dim options available.
- ▶ To use high brightness, low light decline, long life performance CITIZEN COB LED.
- ▶ Working Temperature : -20°C~+45°C



EMC EN 55015 / EN 61000-3-2 / EN 61000-3-3 / EN 61547
LVD EN 60598-2-2 / EN 60598-1 / EN 62471 / EN 62031

Dimension

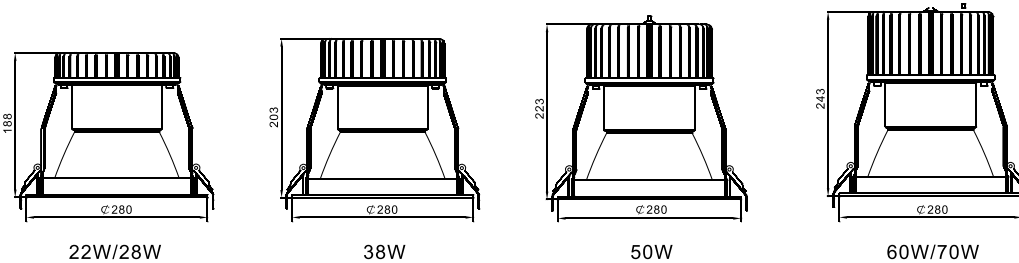

Technical Specification

Model	Voltage	Input Current	Power	Non-DIM Lumen (±5%)			CRI	Power Factor	Cutout
				3000K	4000K	5000K			
BW-2701-22W-A	AC100-265V	520mA	22W	1625	1821	1902	≥83	≥0.95	Ø240
BW-2701-28W-A	AC100-265V	700mA	28W	2826	2906	2984	≥83	≥0.95	Ø240
BW-2701-38W-A	AC100-265V	900mA	38W	3494	3686	3810	≥83	≥0.95	Ø240
BW-2701-50W-A	AC100-265V	1200mA	50W	4452	4810	4903	≥83	≥0.95	Ø240
BW-2701-60W-A	AC100-265V	1500mA	60W	5070	5273	5336	≥83	≥0.95	Ø240
BW-2701-70W-A	AC100-265V	1700mA	70W	6961	8079	8112	≥83	≥0.95	Ø240
BW-2706-100W-A	AC100-265V	2000mA	100W	9723	9887	10007	≥83	≥0.95	Ø240

Photometric Diagram

