

Special Features

- ▶ Unique optical system of focus reflection
- ▶ Double reflecting cups
- ▶ Efficient light output and free of glares
- ▶ Ensure comfortable lighted surrounding
- ▶ Driver: Brettonwoods / Meanwell / Tridonic
- ▶ Non Dim / Triac Dim / 0-10V Dim / DALI Dim options available.
- ▶ To use high brightness, low light decline, long life performance CITIZEN COB LED.
- ▶ Working Temperature : -20°C~+45°C




AC 100-265V
PF ≥0.95
CRI ≥83
DIM
IP20

25°
32°
45°
55°



EMC EN 55015 / EN 61000-3-2 / EN 61000-3-3 / EN 61547
 LVD EN 60598-2-2 / EN 60598-1 / EN 62471 / EN 62031


Dimension

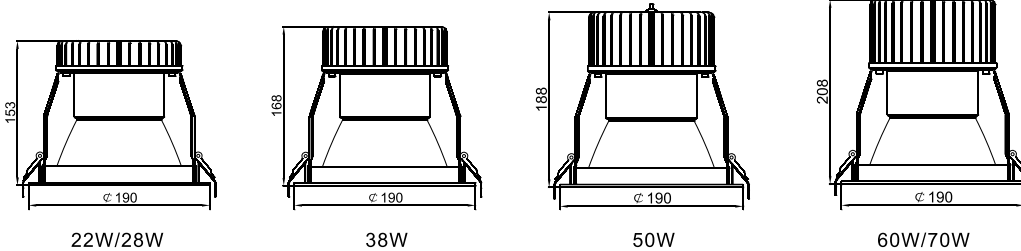



Technical Specification

Model	Voltage	Input Current	Power	Non-DIM Lumen (±5%)			CRI	Power Factor	Cutout
				3000K	4000K	5000K			
BW-2706-22W-B	AC100-265V	520mA	22W	1626	1911	2055	≥83	≥0.95	Ø175
BW-2706-28W-B	AC100-265V	700mA	28W	2583	2775	2866	≥83	≥0.95	Ø175
BW-2706-38W-B	AC100-265V	900mA	38W	3528	4029	4189	≥83	≥0.95	Ø175
BW-2706-50W-B	AC100-265V	1200mA	50W	4575	5045	5132	≥83	≥0.95	Ø175
BW-2706-60W-B	AC100-265V	1500mA	60W	5241	5799	5908	≥83	≥0.95	Ø175
BW-2706-70W-B	AC100-265V	1700mA	70W	6644	7319	7497	≥83	≥0.95	Ø175
BW-2706-100W-A	AC100-265V	2000mA	100W	9723	9887	10007	≥83	≥0.95	Ø175



Photometric Diagram



50W 50° 3000K CRI>80



60W 50° 3000K CRI>80



70W 50° 3000K CRI>80

