


# Bretton Reflector-B LED Down Light


## Special Features

- ▶ Unique optical system of focus reflection
- ▶ Double reflecting cups
- ▶ Efficient light output and free of glares
- ▶ Ensure comfortable lighted surrounding
- ▶ Driver: Brettonwoods / Meanwell / Tridonic
- ▶ Non Dim / Triac Dim / 0-10V Dim / DALI Dim options available.
- ▶ To use high brightness, low light decline, long life performance CITIZEN COB LED.
- ▶ Working Temperature : -20°C~+45°C

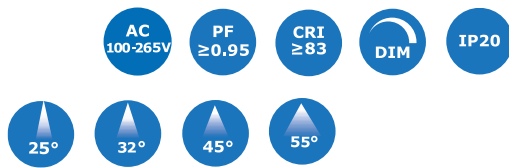

EMC EN 55015 / EN 61000-3-2 / EN 61000-3-3 / EN 61547  
 LVD EN 60598-2-2 / EN 60598-1 / EN 62471 / EN 62031


## Dimension

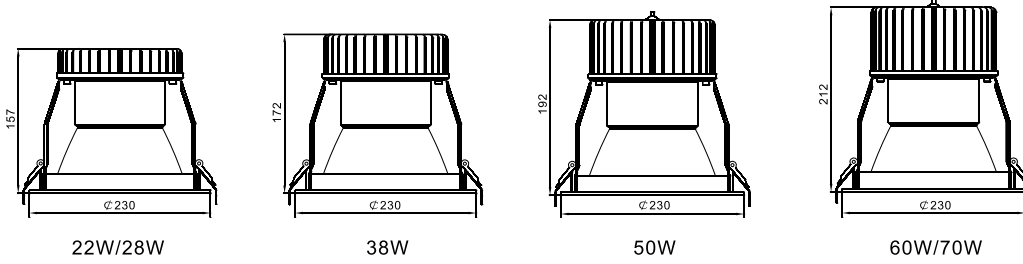



## Technical Specification

Model	Voltage	Input Current	Power	Non-DIM Lumen (±5%)			CRI	Power Factor	Cutout
				3000K	4000K	5000K			
BW-2704-22W-B	AC100-265V	520mA	22W	1862	2050	2155	≥83	≥0.95	Ø215
BW-2704-28W-B	AC100-265V	700mA	28W	2711	2900	3010	≥83	≥0.95	Ø215
BW-2704-38W-B	AC100-265V	900mA	38W	3814	4196	4289	≥83	≥0.95	Ø215
BW-2704-50W-B	AC100-265V	1200mA	50W	5094	5404	5632	≥83	≥0.95	Ø215
BW-2704-60W-B	AC100-265V	1500mA	60W	5698	6218	6309	≥83	≥0.95	Ø215
BW-2704-70W-B	AC100-265V	1700mA	70W	6853	7497	7835	≥83	≥0.95	Ø215
BW-2706-100W-A	AC100-265V	2000mA	100W	9723	9887	10007	≥83	≥0.95	Ø215



## Photometric Diagram



50W 55° 3000K CRI>80



60W 55° 3000K CRI>80



70W 55° 3000K CRI>80

